

alpi



indoor&outdoor

PORCELAIN Collection

Tile & Marble Collection

110 NE 179 St.

Miami, Florida 33162

786-258.4673



Outdoor

Superficie GRIP R11 A+B+C

*Caratteristiche
di resistenza e
bellezza*

With characteristics
of strength and
beauty

La résistance
rime avec
beauté

Strukturelle
Festigkeit und
Schönheit

Изысканная
эстетика и
высочайшая
функциональность

alpi


CERAMICHE DAL 1938



WALL 30x120 . 12"x47" Alpi Avana Rett.
FLOOR 30x120 . 12"x47" Alpi Avana Grip Rett.

superficie grip (R11 A+B+C)

WALL 30x120 . 12"x47" Alpi Avana Rett.
FLOOR 30x120 . 12"x47" Alpi Avana Grip Rett.

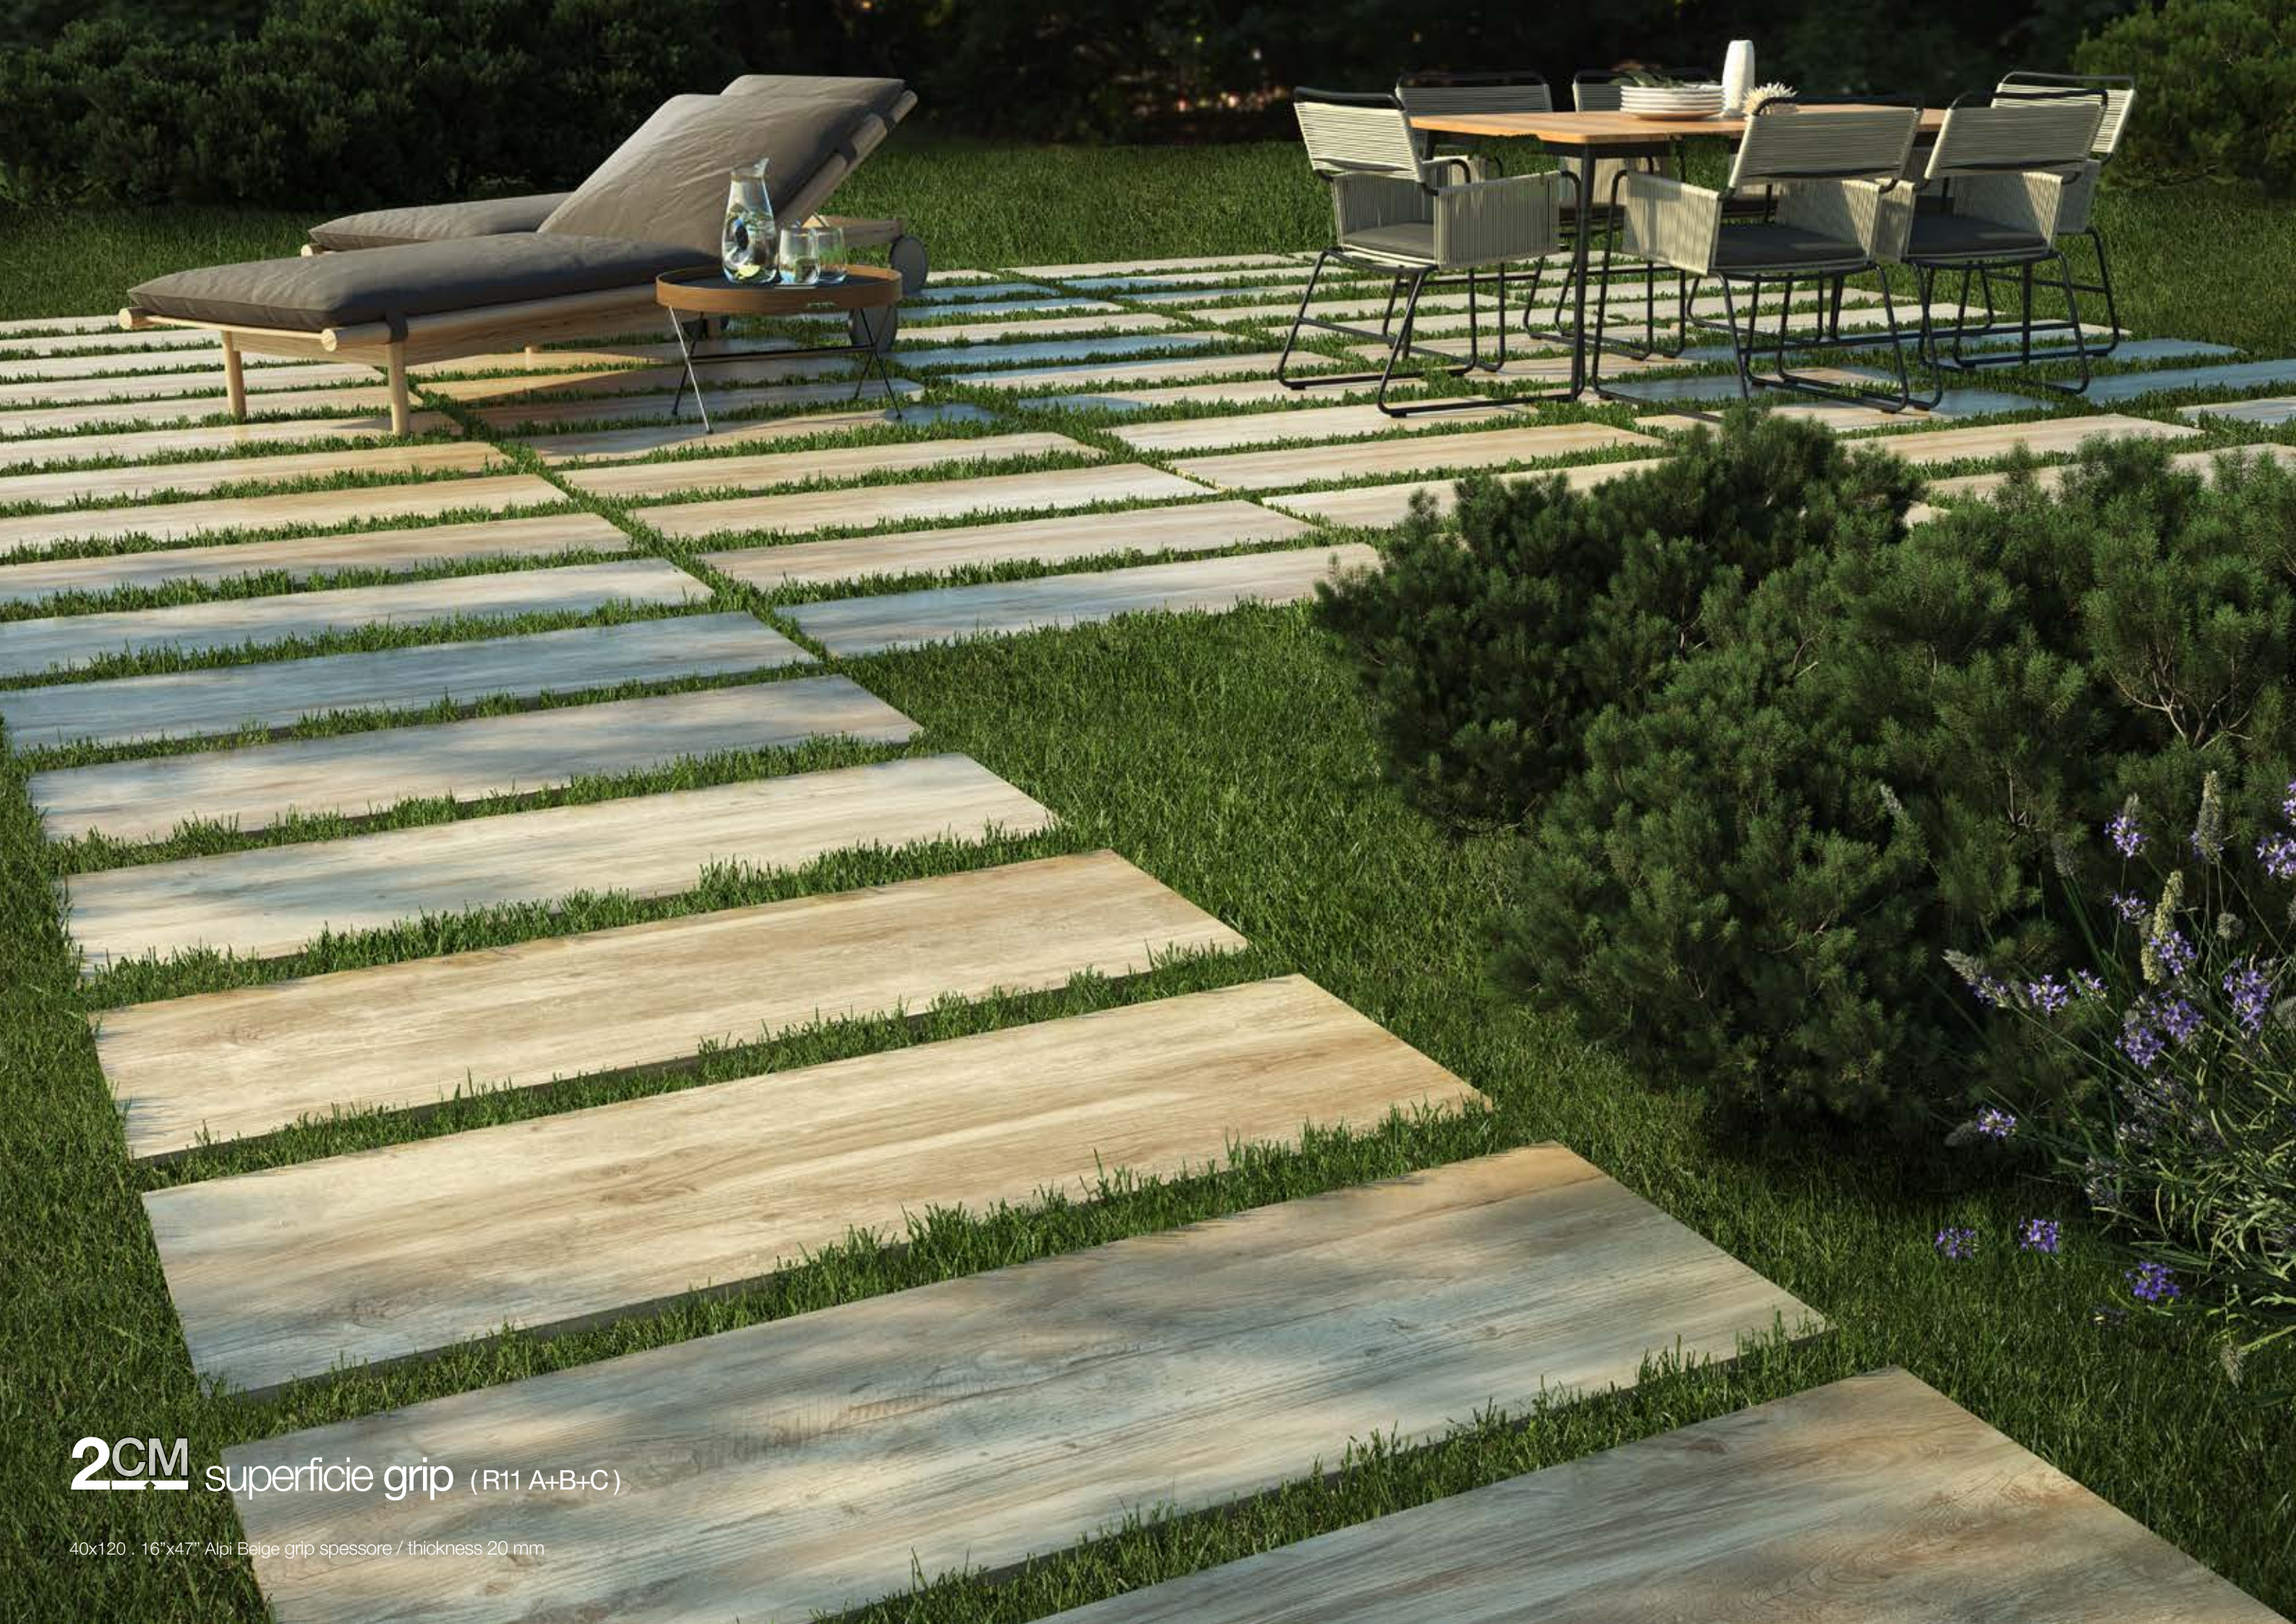

2CM superficie grip (R11 A+B+C)

40x120 . 16"x47" Alpi Beige grip spessore / thickness 20 mm

alpi

indoor&outdoor

Gres porcellanato con colorazione in massa.
Porcelain stoneware with mass colouring.
Grès cérame avec pate colorée.
Durchgefärbtes Feinsteinzeug.
Фарфоровый керамогранит, окрашенный по всей толщине.

CERAMICHE DAL 1938

bianco



grigio



beige



tortora



miele



tabacco




avana



naturale

10 mm

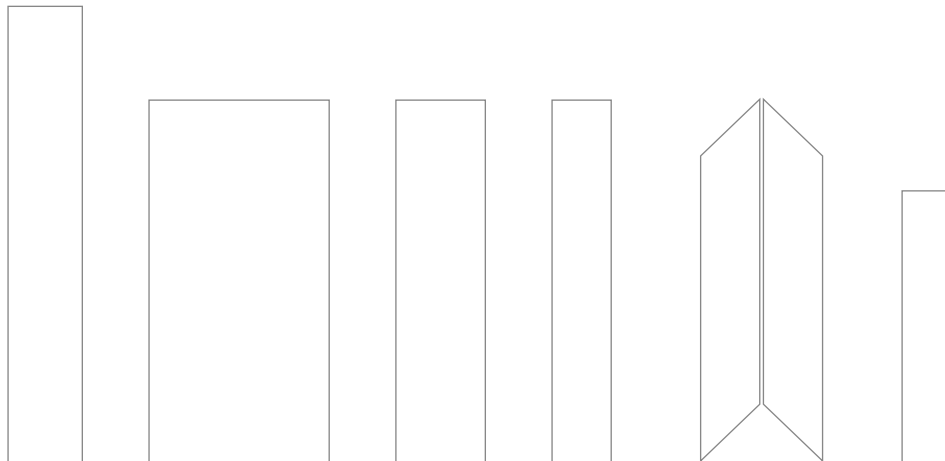

25x151,2 (10"x60")
rettificato

60x120 (24"x47")
rettificato

30x120 (12"x47")
rettificato


20x120 (8"x47")
rettificato

20x120 (8"x47")
chevron rett.

15x90 (6"x36")
naturale ± 8,5 mm

grip

10 mm

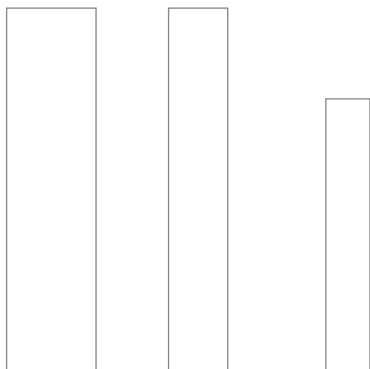

30x120 (12"x47")
rettificato

20x120 (8"x47")
rettificato

15x90 (6"x36")
naturale ± 8,5 mm

grip

20 mm



40x120 (16"x47")
rettificato
ONLY AVANA, BEIGE, MIELE



DIN 51130
R11




DIN 51097
A+B+C

alpi

indoor&outdoor

Gres porcellanato con colorazione in massa.
Porcelain stoneware with mass colouring.
Grès cérame avec pate colorée.
Durchgefärbtes Feinsteinzeug.
Фарфоровый керамогранит, окрашенный по всей толщине.



Pezzi speciali.
Trims. Pieces especiales. Formstücke. Специальные изделия.

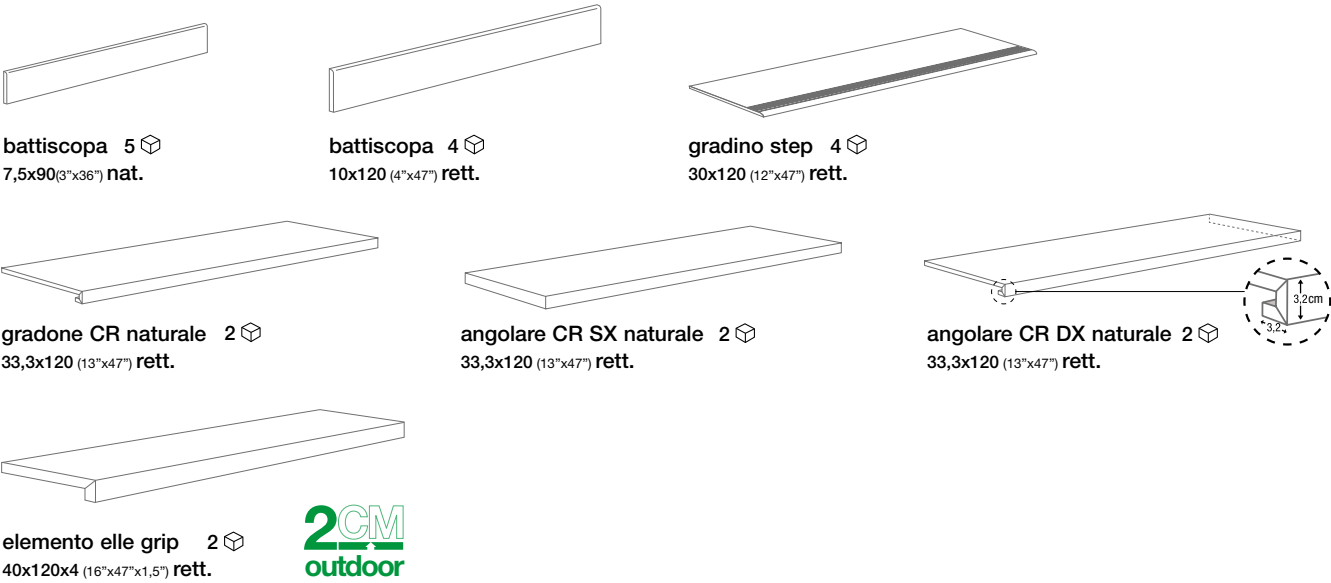

Imballi.
Packing. Emballages. Verpackung. Упаковка.

F.TO NOMINALE / NOMINAL SIZE		mm	pcs / box	M2 / box	BOX / PLT	M2 / PLT	KG / PLT
25x151,2	Rett.	10	3	1,134	48	54,432	1209,60
60x120	Rett.	10	2	1,44	36	51,84	1152
30x120	Rett.	10	3	1,08	20	21,60	480
20x120		10	4	0,96	32	30,72	688
15x90		8,5	7	0,945	48	45,36	884,5
20x120	chevron rett.	10	4	0,80	32	25,60	688
40x120	Rett. 2CM	20	2	0,96	32	30,72	1444

Posa consigliata.
Recommending installation. Installation recommandée. Installation empfohlen. Установка рекомендуется.



Livello di stonalizzazione.
Color shade variations. Variation des nuances de couleur.
Cariation der Farbnuancen.


Fuga minima consigliata. Advised minimum joint.
Joint minimal conseillé. Empfahlte fugе. Минимальный рекомендованный шов между плитками.

V3 MODERATA STONALIZZAZIONE
MODERATE VARIATION
VARIATION MODEREE
MASSIGE ABWEICHUNG

FUGA 2 mm
PER RETTIFICATO

CERAMICHE DAL 1938

Schemi di posa.
Laying solutions. Schemas de pose. Verlegungbeispiele. Композиционные решения.

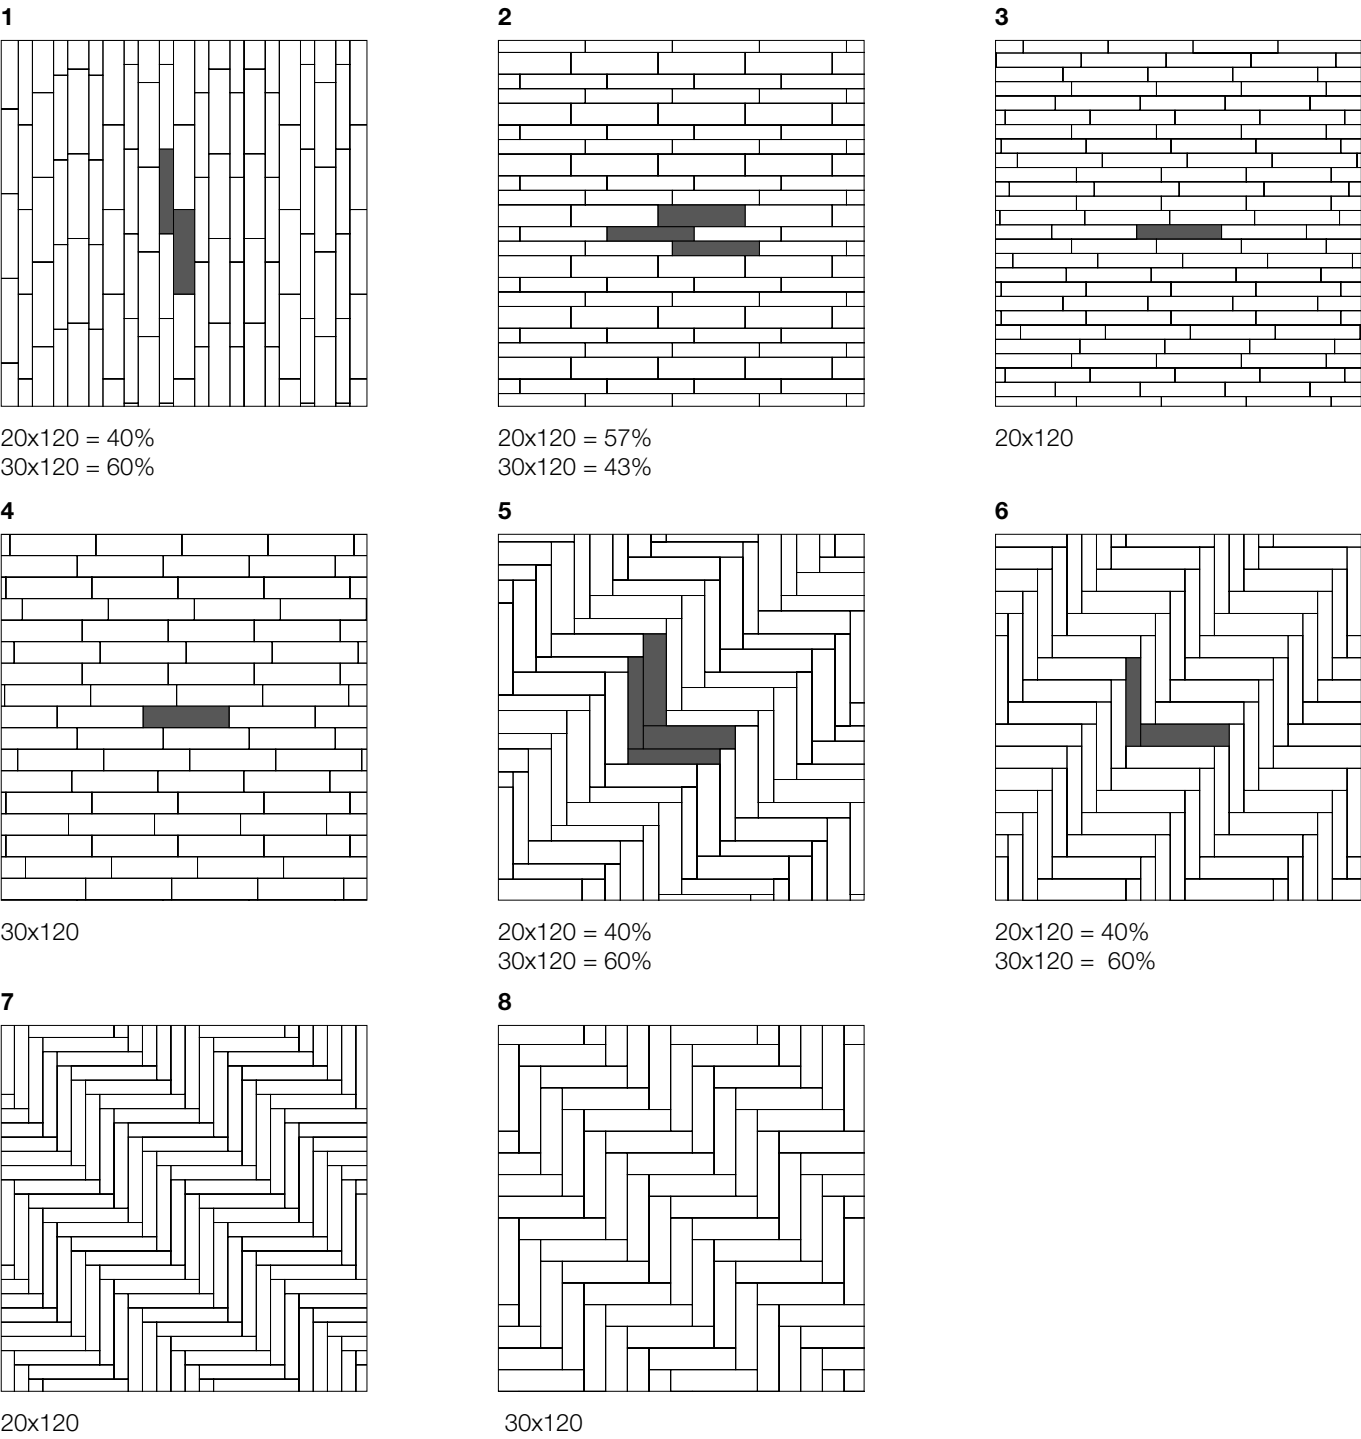

GM	GRES PORCELLANATO CON COLORAZIONE IN MASSA		GRUPPO DI APPARTENENZA SECONDO ISO 13006		
	PORCELAINED STONEWARE WITH MASS COLOURING GRES CERAME AVEC PATE COLOREE DURCHGEFÄRBTES FEINSTEINZEUG GRES PORCELÁNICO CON COLORACIÓN EN MASA ФАРФОРОВЫЙ КЕРАМОГРАНИТ, ОКРАШЕННЫЙ ПО ВСЕЙ ТОЛЩИНЕ		CLASS GROUPE D'APPARTENANCE ZUGEHÖRIGKEITSGRUPPE GRUPO DE PERTENENCIA ГРУППА ПРИНАДЛЕЖНОСТИ	Bla GL	
Simbologia Symbolics Symboles Symbole Simbologias Символы	Caratteristiche Features Caracteristiques Eigenschaften Características Характеристика	Unità di misura Unit of measurement Unité de mesure Masseinheit Unidad de medida Единица измерения	Valore medio Saima Saima mean value Valeur moyenne Saima Durchschnittswert-Saima Valor medio Saima Среднее значение Saima	Valore prescritto Fixed value Valeur prescrite Vorgeschriebener Wert Valor prescrito Требуемое значение	Metodo di prova Test method Méthode d'essai Prüfmethode Método de ensayo Метод испытания
	Dimensione lati Dimensions-Lenght and widht Dimensions-Longueur et largeur Masse-Länge und Breite Dimensiones-Longitud y ancho Размеры сторон	%	+/- 0,4	+/- 0,6 max	UNI EN ISO 10545-2
	Rettilinearità dei lati Side straightness Rectitude des arêtes Geradlinigkeit der Kanten Rectilíneidad de los lados Прямолинейность сторон	%	+/- 0,4	+/- 0,5 max	UNI EN ISO 10545-2
	Ortogonalità degli spigoli Corner squaranness Angularité Rechtwinkligkeit der Kanten Ortogonalidad de las esquinas Ортогональность кромок	%	+/- 0,4	+/- 0,6 max	UNI EN ISO 10545-2
	Planarità Flatness Planéité Ebenfächigkeit Planidad Плоскостность	%	+/- 0,4	+/- 0,5 max	UNI EN ISO 10545-2
	Spessore Thickness Épaisseur Dicke Grosor Толщина	%	+/- 5,0	+/- 5,0 max	UNI EN ISO 10545-2
	Assorbimento d'acqua Water absorption Absorption d'eau Wasseraufnahme Absorción de agua Водопоглощение	%	< 0,2	≤ 0,5	UNI EN ISO 10545-3
	Storzo di rottura Breaking strenght Contrainte de rupture Bruchkraft Esfuerzo de rotura Разрушающее усилие	N	> 1600	≥ 1300 se Spess. ≥ 7,5 ≥ 700 se Spess. ≤ 7,5	UNI EN ISO 10545-4
	Modulo di rottura Modulus of rupture Coefficient de rupture Bruchmodul Módulo de rotura Модуль разрыва	N/mm²	> 40	≥ 35	UNI EN ISO 10545-4
	Dilatazione termica lineare Coeff. of linear thermal expansion Coeff. d'extension thermique linéaire Linearer Wärmeausdehnungs-Koeffizient Coeficiente de dilatación térmica lineal Линейное тепловое расширение	°MK (-1)	7,0	metodo disponibile available method méthode disponible verfügbare methode método disponible требуемое значение	UNI EN ISO 10545-8
	Resistenza agli sbalzi termici Thermal shock resistyance Résistance aux chocs thermiques Temperaturwechsel Beständigkeit Resistencia a choques térmico Стойкость к перепадам температуры	-	resiste resist widerstandsfähig resiste стойкий	metodo disponibile available method méthode disponible verfügbare methode método disponible требуемое значение	UNI EN ISO 10545-9
	Resistenza alle macchie Stain resistance Résistance au tâches Flecken Beständigkeit Resistencia a las manchas Стойкость к образованию пятен	-	≥ 3	3 MIN	UNI EN ISO 10545-14
	Resistenza ai prodotti chimici di uso domestico Resistance to chemical products Résistance aux produits chimiques Beständigkeit gegen Chemikalien Resistencia a los productos quimicos Стойкость к бытовым химикатам	-	conforme conform conforme gleichmässig conforme соответствует	MIN GB	UNI EN ISO 10545-13
	Resistenza agli acidi e alle basi a bassa concentrazione Resistant to acids and low concentration bases Résistance aux acides et aux bases à faible concentration Widerstandsfähig gegenüber niedrig konzentrierten Säuren und Laugen Resistencia a los ácidos y las bases de baja concentración Стойкость к низким концентрациям кислот и щелочей	-	MIN GLB	secondo classificazione prodotto according to product classification selon classification produit Gemäß Produktklassifizierung согласно классификации продукции	UNI EN ISO 10545-13
	Resistenza al gelo Frost resistance Résistance au gel Frostbeständigkeit Resistencia al hielo Морозостойкость	-	resiste resist widerstandsfähig resiste стойкий	richiesta request demande anfrage solicitud требуемое значение	UNI EN ISO 10545-12
	Stabilità dei colori Colour stability Stabilité des coloris Lichtechtheit der Färbung Estabilidad de los colores Цветостойкость	-	stabile stable stable stabil estable стойкий	metodo disponibile available method méthode disponible verfügbare methode método disponible требуемое значение	DIN 51094
	E' a disposizione della gentile clientela la lista dei nostri articoli certificati dall'ente UNI CERTIQUALITY The list of our items certified by "UNI" is available for our customers Pour tous nos clients est disponible la liste de nos produits avec la certification UNI Den Kunden steht eine Aufstellung zur Verfügung der Artikeln die mit UNI Zertifikat bescheinigt wurden La lista de nuestros artículos certificados por el Instituto UNI está a disposición de la estimada clientela. Мы можем предоставить в распоряжении наших заказчиков перечень нашей продукции, сертифицированной органом UNI				